


mariner 2200 K PRO - 2460 K PRO



CONTROL PANEL

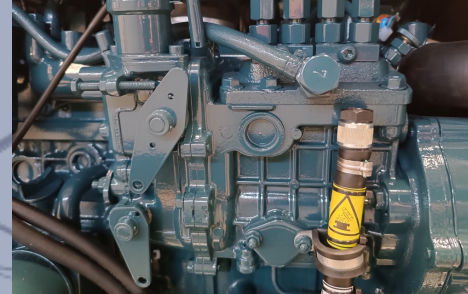

KUBOTA ENGINE



INPUT/OUTPUT FUEL PIPE

the engine is cooled by a coolant loop in a closed circuit. The system consists of a heat exchanger, inside which the heat exchange between coolant and sea water takes place. Two separate pumps provide for the circulation of coolant and seawater. Air flows ensure effective cooling of the alternator.

The excellent accessibility makes maintenance operations easier, even with the generator installed in confined environments.

Compact and quiet, these generators feature super-silent canopies and a dual anti-vibration system, ensuring maximum noise and vibration reduction.

The perfect solution for professional applications.



COMPACT DESIGN



EASY INSTALLATION



SUPER SILENCED

We reserve the right to modify the data, images and drawings in this document without prior notice.

For more detailed information, please contact your local distributor or Mase Generators S.p.A.



mase generators spa

Via Tortona, 345 | 47522 - Cesena (FC) | Italy

Tel. +39 0547 354311

commercial@masegenerators.com

www.masegenerators.com

mase
GENERATORS
Believing in change.

Output power 22 kW 50 Hz - 24 kW 60 Hz

CONTROL PANEL

_ CBU EVO IL4 device controls and drives the genset. The large display and control pushbuttons allow easy use and monitoring:

- Manual start
- Voltage Vac
- Frequency Hz
- Hour meter
- Genset battery voltage
- Oil low pressure alarm
- Engine preheating
- Engine high temperature alarm
- Alternator battery charger failure alarm
- Protection alarm for frequency and rpm
- Alarm history
- Maintenance warnings
- General alarm outlet
- RUN outlet
- Ready outlet
- Programmable AUX outlet

_ Emergency stop button

_ Magneto-thermal protection

ENGINE


_ Easy maintenance access to the feeding and lubrication systems, the sea water pump and the air filter

_ Double vibration dumping system

SOUNDPROOF CABIN

_ Made of extremely light marine aluminum with very high resistance to external agents

Insulated poles kit (for metal hull boats), dry exhaust kit and keel cooling kit are available on request

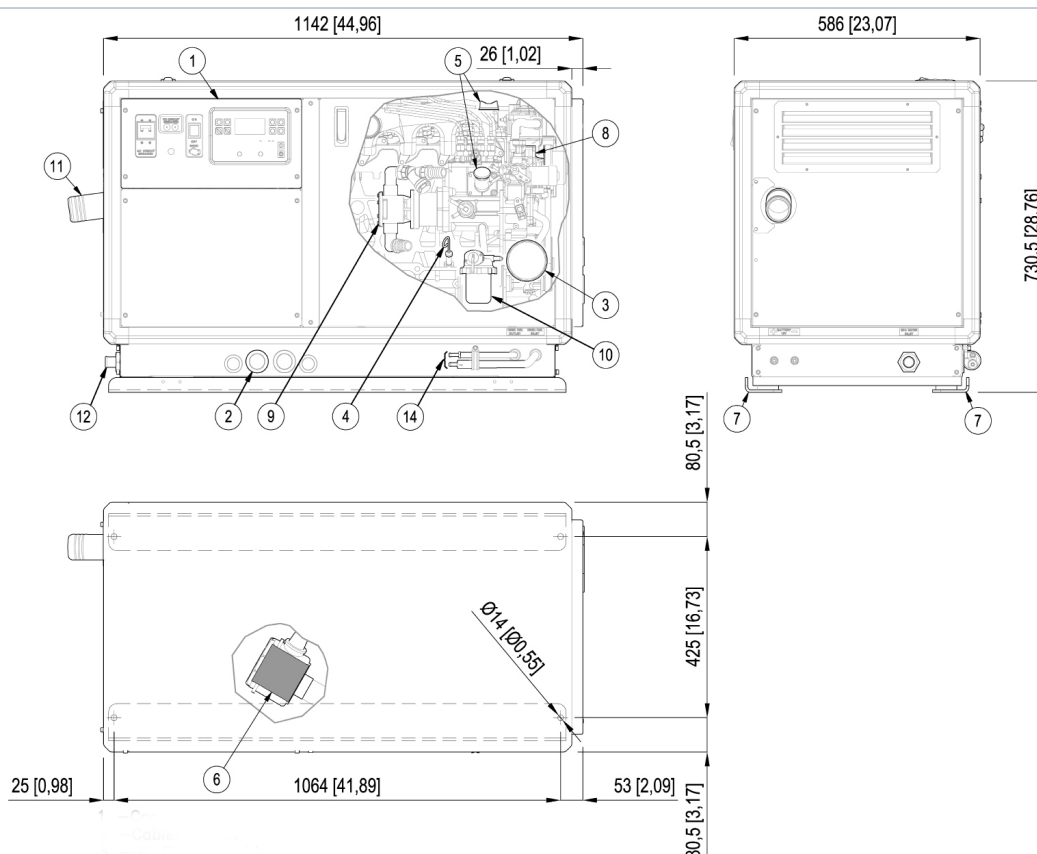

- 1 – Control panel
- 2 – Cables outlet
- 3 – Oil filter cartridge
- 4 – Oil dipstick
- 5 – Engine oil filler

- 6 – Air filter
- 7 – Genset base brackets
- 8 – Fresh water pump
- 9 – Sea water pump
- 10 – Fuel filter

- 11 – Exhaust manifold ($\varnothing 60$ mm)
- 12 – Sea water intake ($\varnothing 25$ mm)
- 13 – Battery connections

- 14 – Fuel tank connections ($\varnothing 8$ mm)

Output power 22 kW 50 Hz - 24 kW 60 Hz

50 Hz

60 Hz  

AC alternator -	Synchronous, 4 poles, with AVR	
Cooling -	Air	
Voltage -	115 or 230 V	120 or 240 V
Frequency -	50 Hz	60 Hz
Amps -	191.3 or 95.7 A	200 or 100 A
Max power -	22 kW	24 kW
Continuous power -	20 kW	22 kW
Power Factor -	cos ϕ 1	
Insulating class -	H	
Voltage stability -	$\pm 2\%$	
Frequency stability -	$\pm 2\%$	

The power is referred to an atmospheric pressure of 100 kPa, a humidity percentage of 30% and an ambient temperature of 25°C.

Model -	KUBOTA V2403	
Type -	Diesel	
Cylinders -	nr 4	
Cylinder block material -	Cast iron	
Bore -	87 mm - 3.43 in	
Stroke -	102 mm - 4.03 in	
Displacement -	2434 cc - 148.53 CID	
Power -	29.5 hp - 21.70 kWm (at 1500 RPM)	35.5 hp - 26.11 kWm (at 1800 RPM)
RPM -	1500	1800
Compression ratio -	23.2:1	
Combustion system -	Indirect injection	
Engine head material -	Cast iron	
Speed governor -	Electronic	
Lubrication system -	Forced	
Oil sump capacity with filter -	6.6 l - 1.86 gl	
Engine stop system -	Electromagnet	
Fuel pump -	Electric	
Max. fuel pump head -	700 mm - 27.5 in	
Fuel consumption -	6.1 l/h - 1.61 gl/h	6.5 l/h - 1.72 gl/h
Starting battery -	100 Ah - 12 V	
Battery charger -	40 Ah - 12 V	
Starter motor -	2 kW - 12 V	
Max. inclination -	25°	
Water pump flow -	28 l/min - 7.39 gl/min	
Sea water inlet pipe \varnothing -	25 mm - 1"	
Exhaust pipe \varnothing -	60 mm - 2.4 in	
Input/Output fuel pipe \varnothing -	8 mm - 5/16"	

Dimensions (L x W x H) -	1142 x 586 x 730 mm - 43.9 x 23 x 28.7 in (with soundproof box)	
Weight -	475 Kg - 1047 lb (with soundproof box)	
Noise Level -	50 dBA a 7 mt (23 ft)	52 dBA a 7 mt (23 ft)

Output power 22 kW 50 Hz - 24 kW 60 Hz

Accessory

Code

ACCESSORIES ON REQUEST

• Filtering kit: sea water inlet, sea water strainer, taps, fittings D.25 - ref.4	03793
• Siphon break D.25 - ref.3	015849
• Vetus LP60 muffler	71711
• Vetus silencer MP60	71746
• Silencer c.71746 with soundproofing sponge	039865
• Vetus Separator LGS6050	71712
• Centek muffler 2" 1/2 - ref.5	71714
• Centek 2" 1/2 water/gas exhaust separator - ref.6	71713
• Remote START/STOP panel with 20m cable for Comap IL4 - ref.1	037561
• Comap IL4 remote start panel with 20-meter cable - ref.2	039607
• Oil water senders kit IS Kubota	039678
• Cruise KIT	913806




.1



.2



.3

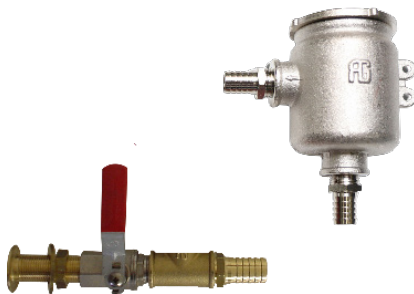

.4



.5



.6